


RENTAL ID 3918, 4440 and 4441

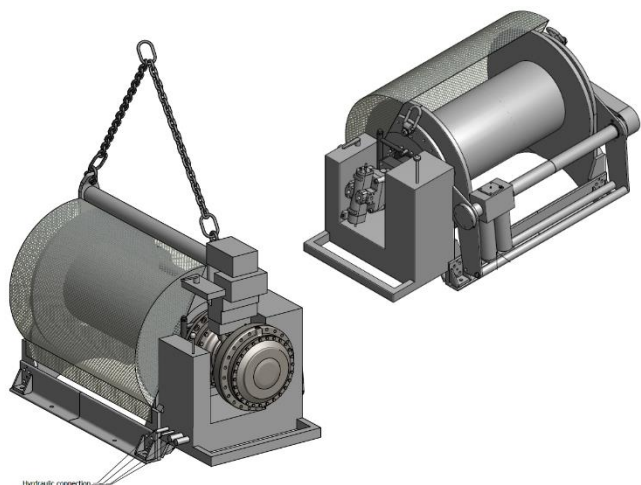

### Hydraulic winch 13 ton

- Compact 13 ton winch for use in hazardous area zone 1. Hydraulic two speed control installed (direct driven).
- Fitted with drip-free 71-series connection on our standardized hose package - set up for our HPU-series.
- Available as geared type or direct drive to ensure low hysteresis in constant tension mode.
- Available as active heave compensated.
- Can be delivered with spooling device and remote panel.
- Documentation available in our client database.

### GENERAL

Owner	KOLOS Lifting & Inspection AS
Type, model and area	13 ton hydraulic winch // HV13-1200-1 and HV13-1200-70 // Zone 1

### CODES / APPROVALS

CE marked	Yes
Other	EN14492-1
NORSOK	Z-015 (U99, normally unmanned) // R-002 (onboard lift)

### SPECIFICATIONS

Design capacity	13T mid drum
Flow and pressure	Up to 450 l/min // From 250 bar to 350 bar depending on type/model
Lifting speed	250 m/min at 6. layer reduced volum // 125 m/min at 6. Layer at full volume *
Misc. equipment	Spooling device (adjustable for 0-90° wire out direction at horizontal. Max fleet angle is 5°)
Drive mode	Available as normal winch, constant tension (CT) and active heave compensated (AHC)

\* Available for rental nr.: 4440 and 4441

### MECHANICAL

Size L x W x H (mm)	2259 x 1384 x 1444
Weight (kg)	2650 kg including spooling device. Weight of wire rope are not included.
Wire rope capacity	Up to 550 meter with 28 mm wire rope
Lifting lugs installed	Yes

*Kolos is a leading supplier for lifting operations.*

*We have drum and linear winches in various sizes, available with constant tension and active heave system.*



[sales@kolos.no](mailto:sales@kolos.no) // +47 98 90 44 44