


RENTAL ID 5387

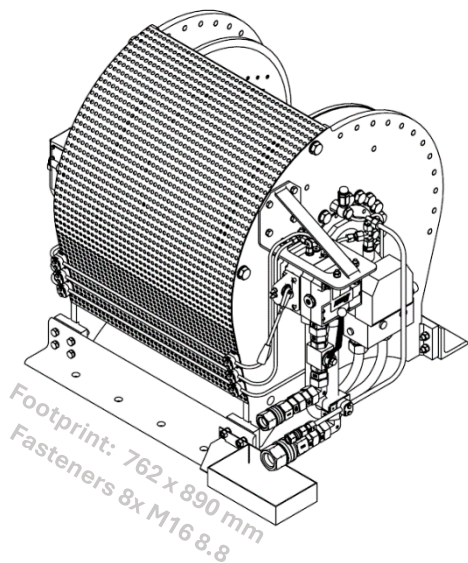

Hydraulic winch 5 ton

- Compact 5 ton winch for use in hazardous area zone 2.
- Fitted with drip-free 71-series connection on our standardized hose package - set up for our HPU-series.
- Storage capacity up to 220 meters with 19 mm wire rope. Can be delivered with tension-spooled wire rope.
- To ensure regulations there is added spooling device, limit switches, emergency stop and drum protection.
- Documentation available in our client database.

GENERAL

Owner	KOLOS Lifting & Inspection AS
Type, model and area	5 ton hydraulic winch // HVB-16 // Zone 2

CODES / APPROVALS

CE marked	Yes (2006/42/EC // 2009-05-20-544)
ATEX and other	Yes (ATEX directive 94/9/EC) // EN 13001 and EN14492-1
NORSOK	Z-015 (U99, normally unmanned)

SPECIFICATIONS

Design capacity	5T at 7. layer with 19 mm wire rope
Flow and pressure	Up to 152 l/min // Max 205 bar
Lifting speed	31,5 m/min at 1. Layer // 47 m/min at 7. layer
Misc. equipment	Spooling device (adjustable for 0-90° wire out direction at horizontal. Max fleet angle is 5°)

MECHANICAL

Size L x W x H (mm)	1188 x 890 x 909
Weight (kg)	700 kg including spooling device. Weight of wire rope are not included.
Lifting lugs installed	Yes

Kolos is a leading supplier for lifting operations.

We have drum and linear winches in various sizes, available with constant tension and active heave system.



sales@kolos.no // +47 98 90 44 44