


RENTAL ID 3836, 3837, 4350, 4351, 4436-4439

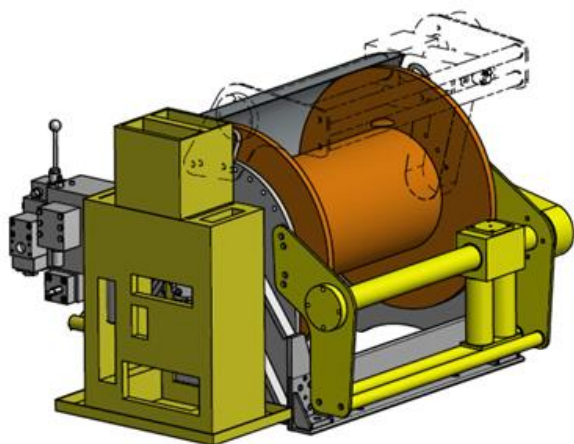

## Hydraulic winch 7 ton

- Compact 7 ton winch for use in hazardous area zone 1.
- Fitted with drip-free 71-series connection on our standardized hose package - set up for our HPU-series.
- Available as geared type or direct drive to ensure low hysteresis in constant tension mode.
- Available as active heave compensated.
- Can be delivered with spooling device and remote panel.
- Documentation available in our client database.

## GENERAL

|                      |   |
|----------------------|---|
| Owner                | KOLOS Lifting & Inspection AS                               |
| Type, model and area | 7 ton hydraulic winch // HV7-900-1 and HV7-900-63 // Zone 1 |

## CODES / APPROVALS

|                |  |
|----------------|--|
| CE marked      | Yes (2006/42/EC // 2009-05-20-544)   |
| ATEX and other | Yes* (ATEX directive 94/9/EC) // EN14492-1 // FEM 9.511 // NS-EN 13155 // NS-EN 1993 |
| NORSOK         | Z-015 (U99, normally unmanned) // R-002 (onboard lift)                               |

\* Available for rental nr.: 4436-4439

## SPECIFICATIONS

|                   |  |
|-------------------|--|
| Design capacity   | 7T mid drum  |
| Flow and pressure | Up to 450 l/min // From 250 bar to 350 bar depending on type/model                             |
| Lifting speed     | 110 m/min at 1. Layer // 170 m/min at 7. layer*  |
| Misc. equipment   | Spooling device (adjustable for 0-90° wire out direction at horizontal. Max fleet angle is 5°) |
| Drive mode        | Available as normal winch, constant tension (CT) and active heave compensated (AHC)            |

\* Available for rental nr.: 4436-4439

## MECHANICAL

|                        |  |
|------------------------|--|
| Size L x W x H (mm)    | 1920 x 1340 x 1250   |
| Weight (kg)            | 1650 kg including spooling device. Weight of wire rope are not included. |
| Lifting lugs installed | Yes  |

*Kolos is a leading supplier for lifting operations.*

*We have drum and linear winches in various sizes, available with constant tension and active heave system.*



[sales@kolos.no](mailto:sales@kolos.no) // +47 98 90 44 44