


RENTAL ID 4105 and 4106

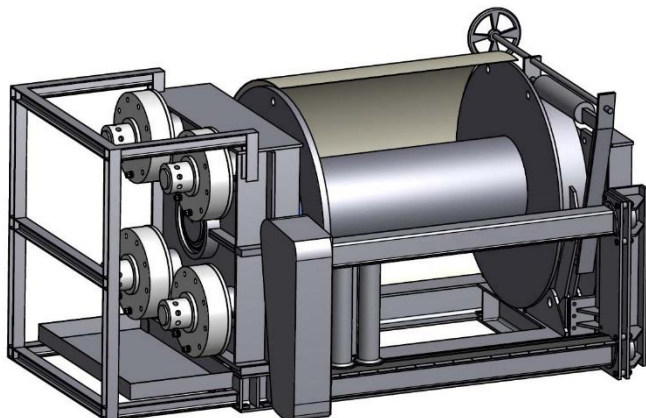

Hydraulic winch 150 ton

- Drum winch with capacity up to 150 ton. For use in hazardous area zone 1.
- Fitted with drip-free 71-series connection on our standardized hose package - set up for our HPU-series.
- Available as constant tension and active heave compensated winch.
- Delivered with lifting lugs.
- Can be delivered with remote panel and spooling device.
- Documentation available in our client database.

GENERAL

Owner	KOLOS Lifting & Inspection AS
Type, model and area	150 ton hydraulic winch // HV150-2000 // Zone 1

CODES / APPROVALS

CE marked	Yes (2006/42/EC // 2009-05-20-544)
ATEX and other	Yes (ATEX directive 94/9/EC) // EN14492-1 // EN 60079-0 // F.E.M 9.511 // DNV 2.7-3
NORSOK	Z-015 (U99, manned under operation) // Norsok R-002 (lifting)

SPECIFICATIONS

Design capacity	96T full drum // 130T half drum
Flow and pressure	Up to 1000 l/min // Max 250 bar
Lifting speed	Up to 8 m/min at full drum // 6 m/min at half drum
Misc. equipment	Remote operated. Load and meter measurement (option; sheave and RLM)
Drive mode	Available as normal winch, constant tension (CT) and active heave compensated (AHC)

MECHANICAL

Size L x W x H (mm)	4200 x 2500 x 2700
Weight (kg)	22 000 kg including spooling device. Weight of wire rope are not included.
Lifting lugs installed	Yes
Wire rope capacity	6 layers with wire rope Ø 72 mm – max 650 meter

Kolos is a leading supplier for lifting operations.

We have drum and linear winches in various sizes, available with constant tension and active heave system.



sales@kolos.no // +47 98 90 44 44