


RENTAL ID 4455 and 4456

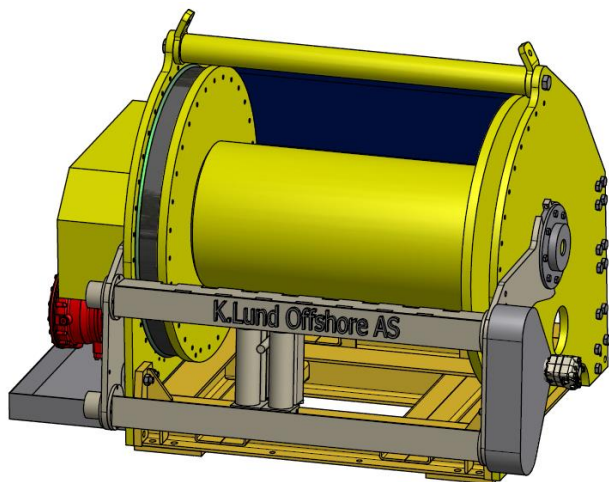

Hydraulic winch 28 ton

- Compact 28 ton winch for use in hazardous area zone 1.
- Fitted with drip-free 71-series connection on our standardized hose package - set up for our HPU-series.
- Direct driven to ensure low hysteresis in constant tension mode. Automatic two-speed control.
- Available as active heave compensated.
- Can be delivered with spooling device and remote panel.
- Documentation available in our client database.

GENERAL

Owner	KOLOS Lifting & Inspection AS
Type, model and area	28 ton hydraulic winch // HV28-1500-7 // Zone 1

CODES / APPROVALS

CE marked	Yes (2006/42/EC // 2009-05-20-544)
ATEX and other	Yes (ATEX directive 2014/34/EU) // EN14492-1 // NS-EN 13155 // NS-EN 1993
NORSOK	Z-015 (U99, normally unmanned) // R-002 (onboard lift)

SPECIFICATIONS

Design capacity	28T mid drum (22 ton top layer)
Flow and pressure	Up to 650 l/min // Max 350 bar
Lifting speed	Up to 70 m/min at full drum (reduced volum) // 46 m/min at full drum (full volume)
Misc. equipment	Spooling device (adjustable for 0-90° wire out direction at horizontal. Max fleet angle is 5°)
Drive mode	Available as normal winch, constant tension (CT) and active heave compensated (AHC)

MECHANICAL

Size L x W x H (mm)	2897 x 2020 x 1996
Weight (kg)	7000 kg including spooling device. Weight of wire rope are not included.
Wire rope capacity	Up to 670 meter with 40 mm wire rope (8. layers)
Lifting lugs installed	Yes

Kolos is a leading supplier for lifting operations.

We have drum and linear winches in various sizes, available with constant tension and active heave system.



sales@kolos.no // +47 98 90 44 44