


RENTAL ID 4392-4394. 4457 and 4530

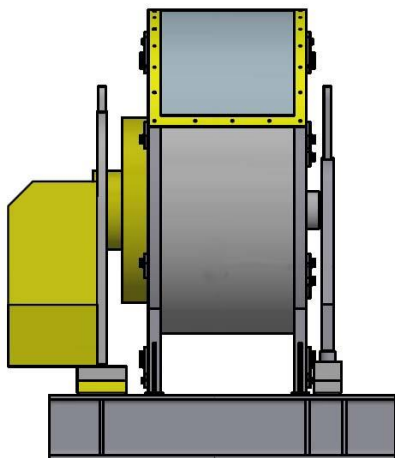

Hydraulic winch 30 ton

- Compact 30 ton winch for use in hazardous area zone 1.
- Fitted with drip-free 71-series connection on our standardized hose package - set up for our HPU-series.
- Geared mode with easy-drive performance.
- Available with double set with brakes in park mode.
- Can be delivered with remote panel and synchron lift system.
- Documentation available in our client database.

GENERAL

Owner	KOLOS Lifting & Inspection AS
Type, model and area	30 ton hydraulic winch // HV30-541-377 // Zone 1

CODES / APPROVALS

CE marked	Yes (2006/42/EC and 2009-05-20 544)
ATEX and other	Yes (2014/34/EU) // NS-EN 1993, Fem 1.001, NS-EN 14492-1, EN 13001 3-1 2018
NORSOK	Z-015 (U99, manned under operation) // R-002 Group G7

SPECIFICATIONS

Design capacity	30T at 3. layer
Flow and pressure	Up to 320 l/min // Max 320 bar
Lifting speed	0-25 m/min with 30 ton SWL
Misc. equipment	Sheave brake (calliper for park) and Synchron lift system

MECHANICAL

Size L x W x H (mm)	1900 x 1725 x 1785
Weight (kg)	5050 kg. Weight of wire rope are not included.
Wire rope capacity	Up to 450 meter with 24 mm wire rope (ID 4393: 650 meter with 24 mm wire rope)
Lifting lugs installed	Yes

Kolos is a leading supplier for lifting operations.

We have drum and linear winches in various sizes, available with constant tension and active heave system.



sales@kolos.no // +47 98 90 44 44