


RENTAL ID 4465

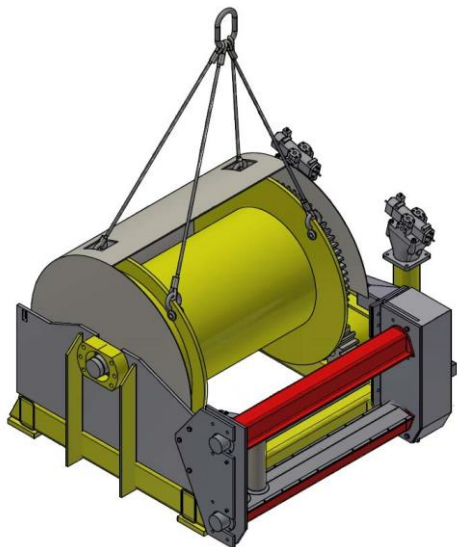

Hydraulic winch 50 ton

- Compact 50 ton winch for use in hazardous area zone 1.
- Fitted with drip-free 71-series connection on our standardized hose package - set up for our HPU-series.
- Failsafe spring applied brake and 3 stage planetary gear.
- Available with spooling device and load measurements (load bolt in sheave or running line monitor).
- Can be delivered with remote panel.
- Lifting gear included.
- Documentation available in our client database.

GENERAL

Owner	KOLOS Lifting & Inspection AS
Type, model and area	50 ton hydraulic winch // HV50-1400-176 // Zone 1

CODES / APPROVALS

CE marked	Yes (2006/42/EC // 1994-08-19-820)
ATEX and other	Yes (ATEX directive 2014/34/EU) // EN14492-1 // NS-EN 13155 // DNV 2.7.2
NORSOK	Z-015 (U99, normally unmanned) // R-002 (onboard lift)

SPECIFICATIONS

Design capacity	50T mid drum (40 ton top layer)
Flow and pressure	Up to 240 l/min // Max 320 bar
Lifting speed	Up to 10 m/min at half drum
Misc. equipment	Spooling device (Horizontal. Max fleet angle is 3°)

MECHANICAL

Size L x W x H (mm)	2800 x 2500 x 1855
Weight (kg)	7870 kg including spooling device. Weight of wire rope are not included.
Wire rope capacity	Up to 266 meter with 54 mm wire rope (3. layers)
Lifting lugs installed	Yes

Kolos is a leading supplier for lifting operations.

We have drum and linear winches in various sizes, available with constant tension and active heave system.



sales@kolos.no // +47 98 90 44 44