


RENTAL ID 5183, 7460 and 7461

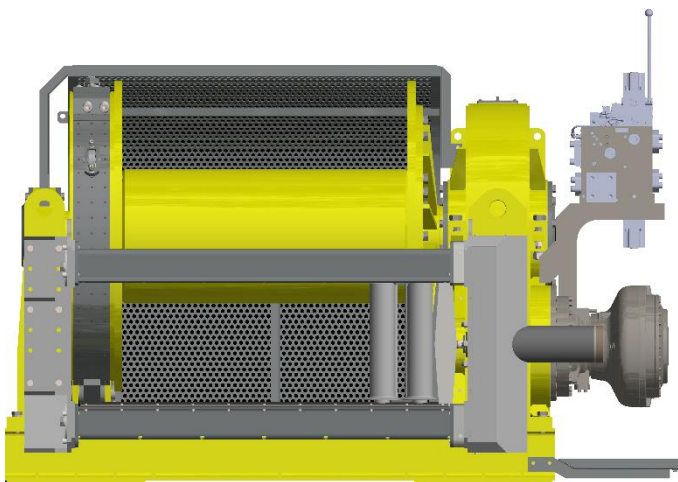

Hydraulic winch 60 ton

- Compact 60 ton winch for use in hazardous area zone 1.
- Fitted with drip-free 71-series connection on our standardized hose package - set up for our HPU-series.
- Direct driven to ensure low hysteresis in constant tension mode. Automatic gear config for speed control.
- Available as active heave compensated.
- Can be delivered with spooling device, electronic overload protection and remote panel.
- Documentation available in our client database.

GENERAL

Owner	KOLOS Lifting & Inspection AS
Type, model and area	60 ton hydraulic winch // HV60 // Zone 1

CODES / APPROVALS

CE marked	Yes (2006/42/EC // 2009-05-20-544)
ATEX and other	Yes (ATEX directive 2014/34/EU) // EN14492-1 // EN 13001 // EN 14462 // EMC directive
NORSOK	Z-015 (U99, normally unmanned) // R-002 (onboard lift)

SPECIFICATIONS

Design capacity	60T mid drum (42,5 ton top layer – 7. layer)
Flow and pressure	Up to 1000 l/min // Max 350 bar
Lifting speed	Up to 200 m/min at full drum (reduced volum)
Misc. equipment	Spooling device, electronic overload system and hydraulic remote control system
Drive mode	Available as normal winch, constant tension (CT) and active heave compensated (AHC)

MECHANICAL

Size L x W x H (mm)	3312 x 2387 x 2060
Weight (kg)	12 600 kg including spooling device. Weight of wire rope are not included.
Wire rope capacity	Up to 574 meter with 54 mm wire rope (7. layers)
Lifting lugs installed	Yes (DNV 2.7.3)

Kolos is a leading supplier for lifting operations.

We have drum and linear winches in various sizes, available with constant tension and active heave system.



sales@kolos.no // +47 98 90 44 44