


RENTAL ID 7333

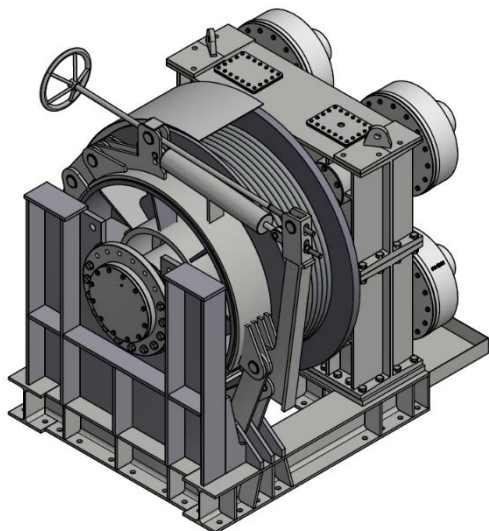

Hydraulic winch 75 ton

- Compact 75 ton winch for use in hazardous area zone 1.
- Fitted with drip-free 71-series connection on our standardized hose package - set up for our HPU-series.
- Available as active heave compensated.
- Small drum to fit space-limited areas offshore. Also suitable for short distance to fixed structure such as sheaves.
- Can be delivered with remote panel.
- Documentation available in our client database.

GENERAL

Owner	KOLOS Lifting & Inspection AS
Type, model and area	75 ton hydraulic winch // HV75 // Zone 1

CODES / APPROVALS

CE marked	Yes (2006/42/EC // 2009-05-20-544)
ATEX and other	Yes (ATEX directive 94/9/EC) // EN14492-1 // DNVGL-ST-E-273
NORSOK	Z-015 (U99, normally unmanned)

SPECIFICATIONS

Design capacity	75T full drum
Flow and pressure	Up to 650 l/min // Max 220 bar
Lifting speed	Up to 28 m/min at full drum // 19 m/min at half drum
Misc. equipment	Remote operated. Load and meter measurement (option; sheave and RLM)
Drive mode	Available as normal winch, constant tension (CT) and active heave compensated (AHC)

MECHANICAL

Size L x W x H (mm)	2700 x 2500 x 2700
Weight (kg)	17 500 kg including spooling device. Weight of wire rope are not included.
Lifting lugs installed	Yes

Kolos is a leading supplier for lifting operations.

We have drum and linear winches in various sizes, available with constant tension and active heave system.



sales@kolos.no // +47 98 90 44 44